

TENSION TOOLS



ADVANCED CABLE TIES, INC.



AL-100



AL-300



AL-200



AL-900

CABLE TIE INSTALLATION/TENSION TOOLS


Quickly tension and automatically cut off excess strap with no sharp protrusions to cause snags, cuts, or abrasions to cables, hoses, products, or users

- **A-100** Cost effective, lightweight durable tool saves time. Tie rating: 18-50 lb-f / 80-222n
- **A-200** Adjustable bundle tension avoids under or over tightening. Produces consistent tension from tie to tie. Tie rating: 18-50 lb-f / 80-222n
- **A-300** Durable tension and cut off tool designed for larger cable ties (120 lb-f & 175 lb-f)
- **A-900** Stainless Steel cable tie installation tool eliminates extremely sharp metal protrusions and produces consistent tension from tie to tie.
Tie rating: 100 to 300 lb-f Stainless Steel

Related product lines



Standard
Cable Ties



Mounting Bases



Removal Tools

ACT[®]
ADVANCED CABLE TIES, INC.
245 Suffolk Lane, Gardner, MA 01440
Phone: 800.861.7228 - Fax: 978.630.3999
sales@actfs.com

TENSION TOOLS



ADVANCED CABLE TIES, INC.

OPERATING INSTRUCTIONS



AL-100

Manual Twist Off

Cinch cable tie around items to approximate bundle diameter. Insert exposed cable tie strap into side of tension tool. Squeeze trigger and hold until desired bundle tension is reached and twist the tension tool clockwise and then counterclockwise until cable tie strap is cut off.



AL-200

Automatic Flush Cut Off

Recommended Cable Ties - 18 lb-f through 50 lb-f
Tension Setting - 1 is the lowest bundle tension
3 is the highest bundle tension.


Cinch cable tie around items to approximate bundle diameter. Insert exposed cable tie strap into side of tension tool. Squeeze trigger until cable tie strap is cut off.



AL-300

Manual Flush Cut Off

Cinch cable tie around items to approximate bundle diameter. Insert exposed cable tie strap into the slot by the cutting blade from the top down through the tip of the gun. Squeeze the two larger handles together until desired bundle tension is reached. Continue holding the two larger handles together and squeeze the cutting handle until the tie strap is cut off.

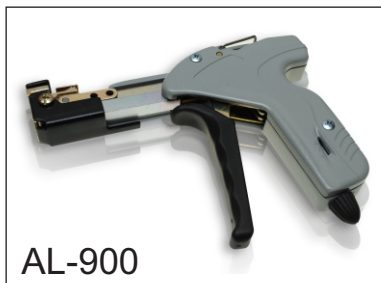

AL-900

Automatic Flush Cut Off

Tie Rating: 100 to 300 lb-f Stainless Steel
Tension Setting - 0 is the lowest bundle tension
3 is the highest bundle tension.

Cinch cable tie around items to approximate bundle diameter. Insert exposed cable tie strap into side of tension tool. Squeeze trigger until cable tie strap is cut off.



ADVANCED CABLE TIES, INC.

245 Suffolk Lane, Gardner, MA 01440
Phone: 800.861.7228 - Fax: 978.630.3999
sales@actfs.com