



PMW

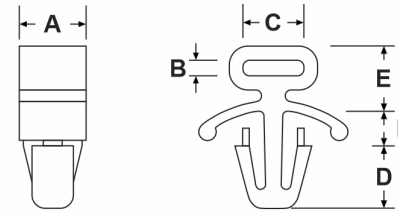

PMW1

ADVANCED CABLE TIES PART NUMBER	PANEL THICKNESS		A IN (mm) +/- .012 (.30mm)	B IN (mm) +/- .012 (.30mm)	C IN (mm) +/- .012 (.30mm)	D IN (mm) +/- .012 (.30mm)	E IN (mm) +/- .012 (.30mm)	F IN (mm) +/- .012 (.30mm)	NOMINAL HOLE DIAMETER IN (mm)	ANSI/UL 94 MH FLAMABILITY RATING													
	IN (mm)																						
AP(R, L)-PMW-9-C	.062 - .187 (1.5 - 4.7mm)		.394 (10.00mm)	.102 (2.59mm)	.323 (8.20mm)	.302 (7.67mm)	.30 (7.62mm)	.131 (3.32mm)	.250 (6.30mm)	V-2													
AP(R, L)-PMW1-9-C	.047 - .109 (1.19 - 2.77mm)		.280 (7.10mm)	.067 (1.70mm)	.250 (6.30mm)	.265 (6.73mm)	.274 (6.95mm)	.148 (3.75mm)	.250 (6.30mm)	V-2													
AP(R, L)-PMW1-0-C	.047 - .109 (1.19 - 2.77mm)		.280 (7.10mm)	.067 (1.70mm)	.250 (6.30mm)	.265 (6.73mm)	.274 (6.95mm)	.148 (3.75mm)	.250 (6.30mm)	V-2													
																							
												ADVANCED CABLE TIES - WING STYLE PUSH MOUNTS											
												D		12/23/22		DW	RB	RB	COLOR DESIGNATIONS: 9 = NATURAL 0 = BLACK			MATERIAL: NYLON 6/6 POLYAMIDE	
														C		3/6/18	PB	EG					
B		4/27/17	JA	KT	KT	DRAWN BY DATE CHECK SCALE JA 4/27/17 KT NONE																	
A		2/29/16	JA	KT	KT																		
REV	DATE	BY	CHK	APPROVE	DESCRIPTION																		

CONFIDENTIAL PROPERTY OF ADVANCED CABLE TIES, INC.

THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF ADVANCED CABLE TIES, INC.

SPC-4.10.78.3